

Art Glass Supplies

Create Inspire Fuse

CERAMIC KILN – FIREBOX 8X4LT

CONTROLLED SPEED

The FireBox 8×4 LT has all the speed of the FireBox 8 but with the precision of the GlassMaster LT Controller.



FEATURES

Brand New Controller

The FireBox 8×4 LT now has a brand new controller that allows you to fire Glass and Ceramics. It even has built in programs for Precious Metal Clay. Here is what you get:


- **GlassFire Mode** allows you to write a program simply by choosing your technique and the speed. It's that easy!



- **ConeFire Mode** allows you to fire Ceramics simply by entering the Cone Value, Firing Speed and Hold Time.
- **PMC Mode** is even easier. All you enter is the type of Metal Clay you are using and press start.
- Write your own firing programs with up to 8 Segments using **Ramp and Hold**. Now you can store up to 5 programs.
- Adjust temperatures or hold times while the kiln is firing using **Add Time** or **Add Temp** or simply select **Anneal Now** to set your project and begin annealing it.

Plugs Into Household Voltage

Nothing against electricians, but who really enjoys paying to have their house rewired. With the FireBox 8×4 LT you take it out of the box, plug it into any spare 120V outlet you have in the house and you are ready to start fusing. Okay, it does need to be a grounded outlet.



Stay Cool Handle


Glass fusers are always lifting their lids when their kilns are hot to take a peek. The wood handle on the FireBox 8×6 LT stays cool even when the kiln is at peak temperature.

Lid Opens Over 90 Degrees

Why is this important you ask? We are glad you did. When the lid can open past 90 degrees it will not be in your way when you go to load your shelf. That's it!

PRODUCT SPECIFICATIONS AND DIMENSIONS

DIMENSIONS

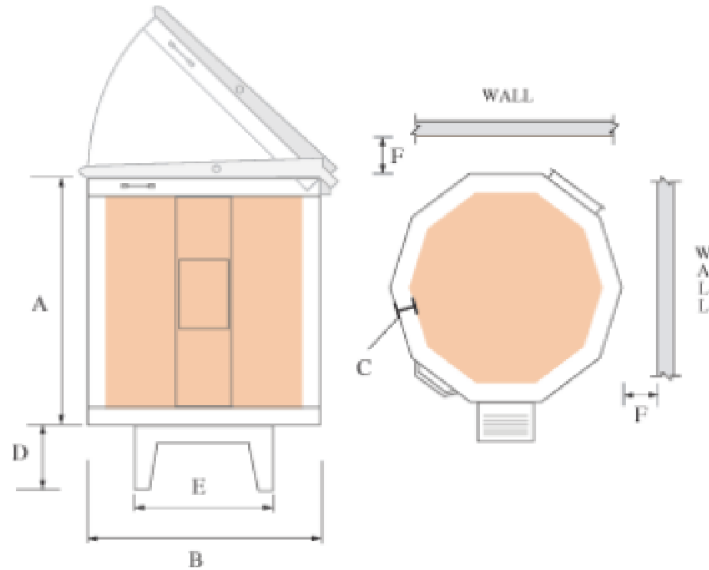

Model	Phase	Volts	Maximum		Power		Copper Wire Size	NEMA Receptacle	BTU's
			Cone	Temp(F)	Amps	Watts			
FIREBOX 8x4LT	1	115	10	2350	15	1725	12	5 - 15	2200

CHAMBER CAPACITY

Approximately 8 in. x 8 in. opening and 4.5 in. high. 0.17 cubic feet.

Depth	Opening Width	Opening Length	Cubic Ft.
4.5 in.	8.0 in.	8.0 in.	0.17

Controller

Thermocouple: -

Clock: 60 Mhz

Voltage: 0 DC Relays

Output: 0 Volts DC

Fuse: 0.5 AMP



WARRANTY



- Unlike most warranties, ours covers Parts **AND Labor**.
- Never Pro-Rated.
- Serviced by the most extensive, knowledgeable and talented distributor network in the industry.
- Backed by a company whose mission statement is “We help you make great things”. When your kiln is down, you can’t make great things.

SHIPPING

Weight listed is only an approximation. Actual weight will vary due to humidity levels and varying brick density.

Weight(lbs):53

Skutt Kilns should arrive fully assembled.

